


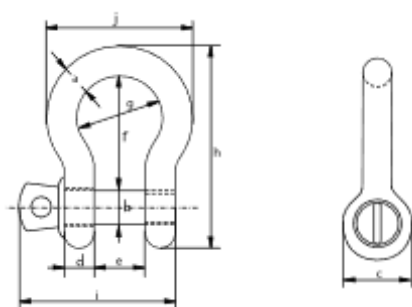

Référence	C.M.U	A	B	C	D	E	F	G	H	I	J	Poids
	[t]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
GPGHBB05	0,33	5	6	12	5	9.5	22	16	36	29.5	26	0.02
GPGHBB06	0.5	7	8	16.5	7	12	29	20	48.5	38	34	0.05
GPGHBB08	0.75	9	10	20	9	13.5	32	22	56	46.5	40	0.1
GPGHBB10	1	10	11	22.5	10	17	36.5	26	63.5	54	46	0.14
GPGHBB11	1.5	11	13	26.5	11	19	43	29	74	59.5	51	0.19
GPGHBB13	2	13.5	16	34	13	22	51	32	89	73	58	0.36
GPGHBB16	3.25	16	19	40	16	27	64	43	110	89	75	0.63
GPGHBB19	4.75	19	22	46	19	31	76	51	129	103	89	1.01
GPGHBB22	6.5	22	25	52	22	36	83	58	144	119	102	1.5
GPGHBB25	8.5	25	28	59	25	43	95	68	164	137	118	2.21
GPGHBB28	9.5	28	32	66	28	47	108	75	185	153	131	3.16
GPGHBB32	12	32	35	72	32	51	115	83	201	170	147	4.31
GPGHBB35	13.5	35	38	80	35	57	133	92	227	186	162	5.55
GPGHBB38	17	38	42	88	38	60	146	99	249	203	175	7.43
GPGHBB45	25	45	50	103	45	74	178	126	300	243	216	12.84
GPGHBB50	35	50	57	111	50	83	197	138	331	272	238	18.15
GPGHBB57	42.5	57	65	130	57	95	222	160	377	310	274	26.29
GPGHBB65	55	65	70	145	65	105	260	180	433	344	310	37.6

CARACTERISTIQUES

- **MATIERE** : acier doux, non traité, grade 30
- **FINITION** : Zingage ou brut
- **REMARQUE** : Ces manilles ne doivent pas être utilisées pour des travaux de levage

✓ **Certificat** : Ce produit est livré avec une déclaration de conformité CE.