


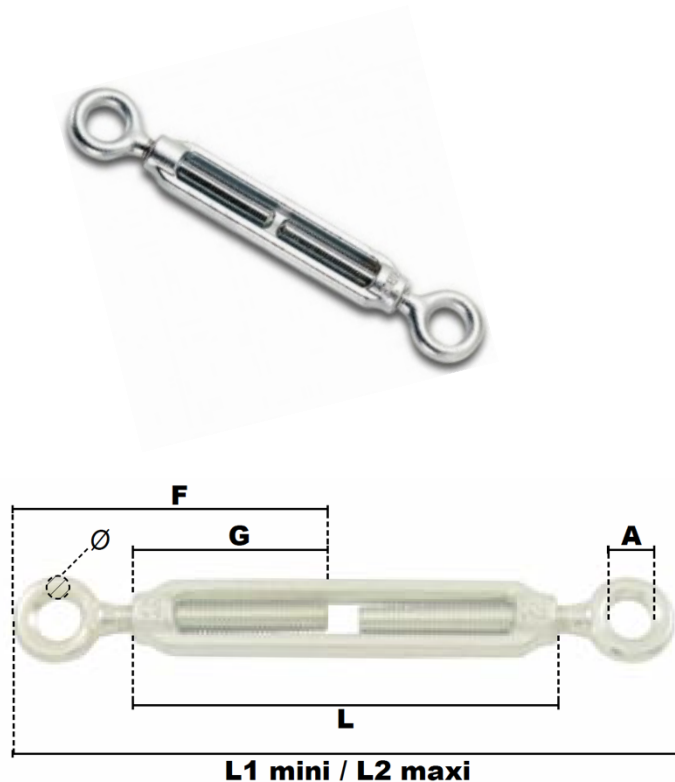

Référence	Filetage	CMU	Ø	A	F	G	L	L1	L2	Poids
		[kg]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
TAA105	M5	90	3.5	8	61	45	80	119	180	0.056
TAA106	M6	140	4.5	10	74.5	55	80	148	207	0.07
TAA108	M8	270	6	11	79	57	105	155	235	0.124
TAA110	M10	480	7	14	94	68	125	190	280	0.208
TAA112	M12	650	8	17	106	74	140	215	310	0.342
TAA114	M14	740	8.5	18	127	93	170	250	380	0.572
TAA116	M16	1300	13	25	145	100	190	290	430	0.824
TAA118	M18	1650	14	25	161	117	205	340	495	1.16
TAA120	M20	2000	16	26	185	130	220	370	535	1.614
TAA122	M22	2470	18	30	200	140	240	410	590	2.154
TAA124	M24	2940	18	34	220	145	260	450	645	2.832
TAA127	M27	3700	20	38	230	160	300	490	690	4.714
TAA130	M30	4680	25	41	250	170	310	530	720	6.394
TAA133	M33	5670	-	-	-	-	-	-	-	-
TAA136	M36	6800	-	-	-	-	-	-	-	-
TAA139	M39	7950	-	-	-	-	-	-	-	-

CARACTERISTIQUES

- **MATIERE** : Cage acier C15 ; anneau en acier Fe430B
- **FINITION** : Zingué blanc
- **COEFFICIENT DE SECURITE** : La charge de rupture est obtenue en multipliant la CMU par le coefficient de sécurité 4